


One-to-More Control Wiring Diagram For Elevator (Manage the elevator below 20 floors)

VER:20151113DTEN

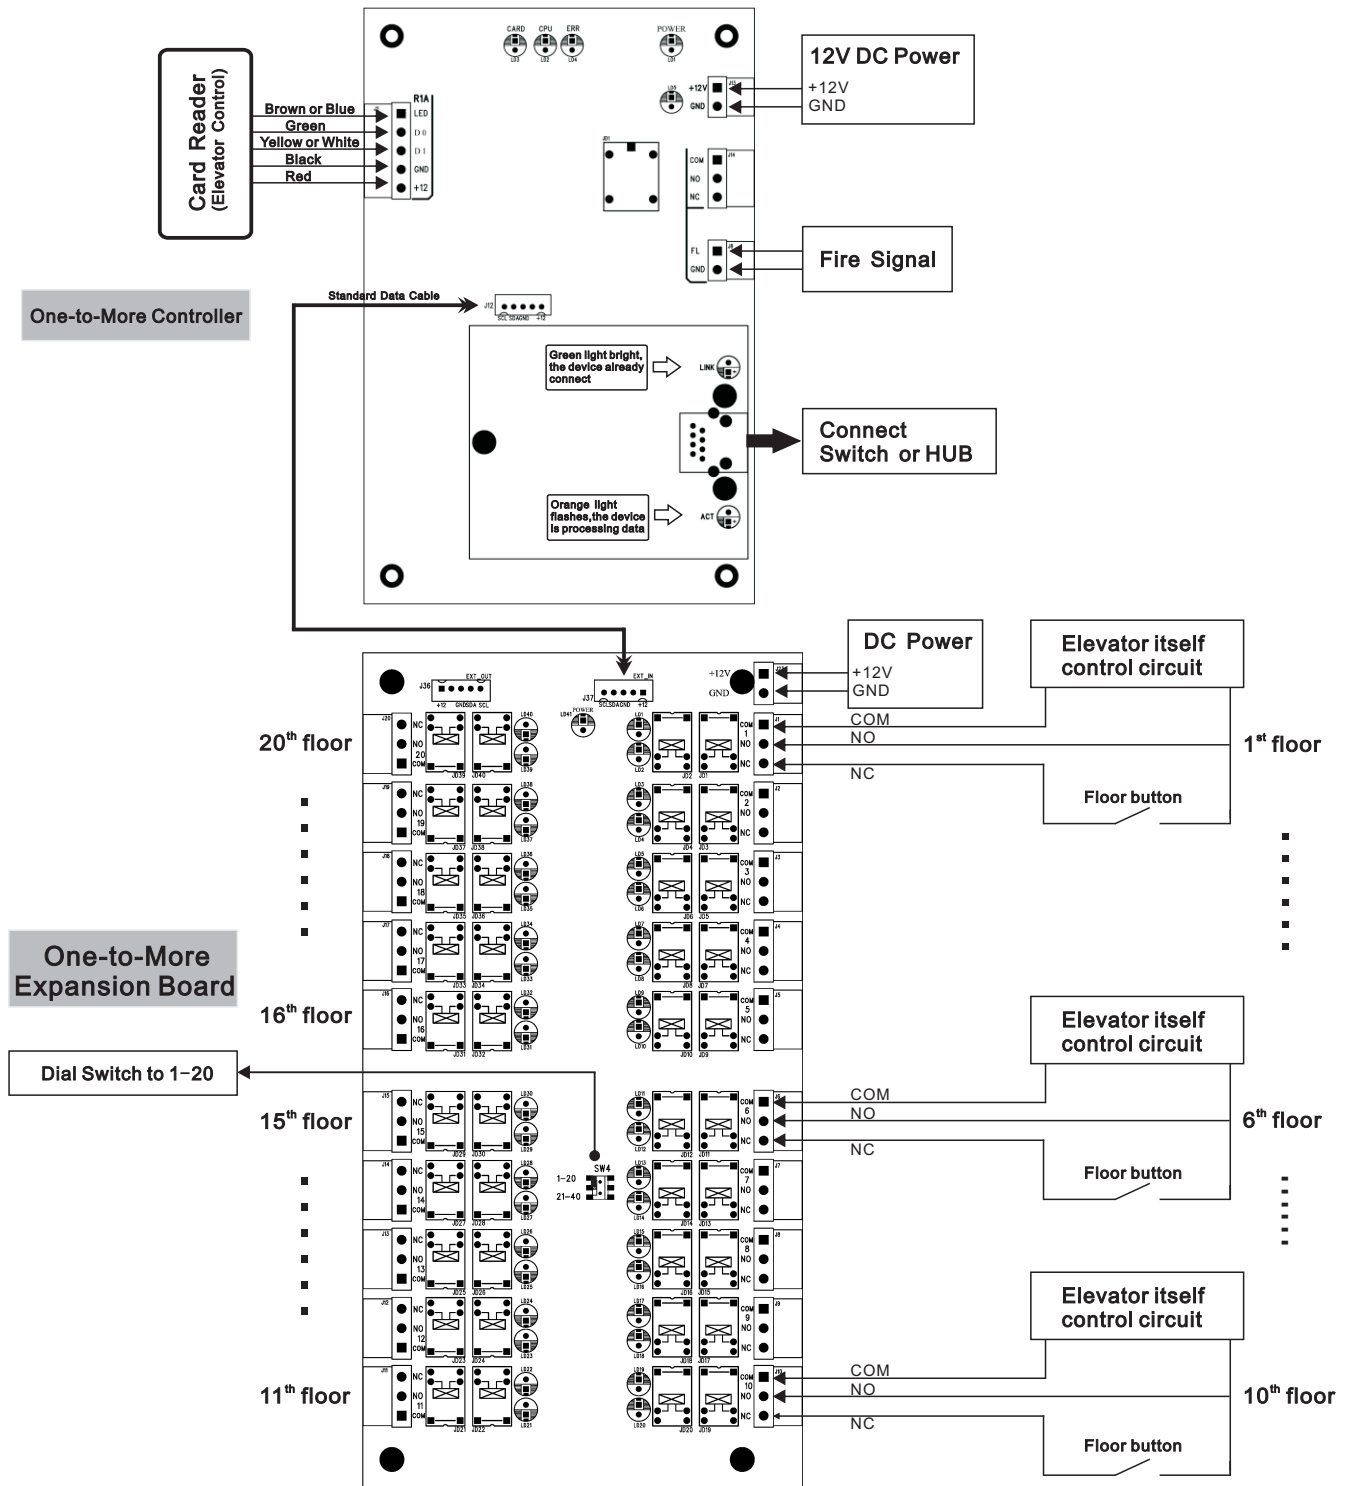

Comment:

- 1、The controller controls the floor number keys on the panel of the elevator, and does not control the uplink and downlink of the elevator.
- 2、Controller in the case of power failure or fire signal occurs, the expansion of the board relay output NC, COM in a closed state.
- 3、In the case of power supply, the COM and NC, NO of the extended board relay are in a state of disconnection.
- 4、When the user has only a single layer of privilege, the expansion board corresponds to the COM and NO of the output of the floor relay;
- 5、When the user has the multi layer privilege, the expansion board corresponds to the COM and NC of the output of the floor relay;

Note: The Card reader of the controller is installed on the elevator panel, the practical application, the 1st floor digital key may control or no control, if not controlled, with single layer privilege of users, after swipe card directly reach the floor of the designated; users with multi layer privilege, after swipe card also need to press the floor number key .Otherwise,if the control, all users are in accordance with the multi layer privilege method use the elevator.